


## CHT-733-20

## V-GROOVE SMOOTH STEEL INSULATED DOOR

### SERIES FEATURES


- 1 3/4" (44.5mm) - Thick CFC-Free Polyurethane
- 16.18 Calculated R-Value
- .062 Calculated U-Value
- 20-Gauge Galvanized Steel
- Full Thermal Break
- Available with Wind Load
- 2 Color Options
- Industry Leading Warranty
- 10-Year Rust & Delamination
- 6-Year Hardware
- 3-Year Spring

### Cross Section



**1 3/4" (44.5mm)  
Thick Sections**

### AVAILABLE COLORS



*Colors are not exact due to the differences in monitor and printer calibrations. For accurate color samples, contact Haas Door for a metal color selector.*


### MODEL FEATURES

- 16 ga. Galvanized Steel End Stiles
- 20 ga. V-groove smooth outside and 20 ga. V-groove pattern smooth inside
- Tongue and groove section joint

### Exterior View



### Interior View

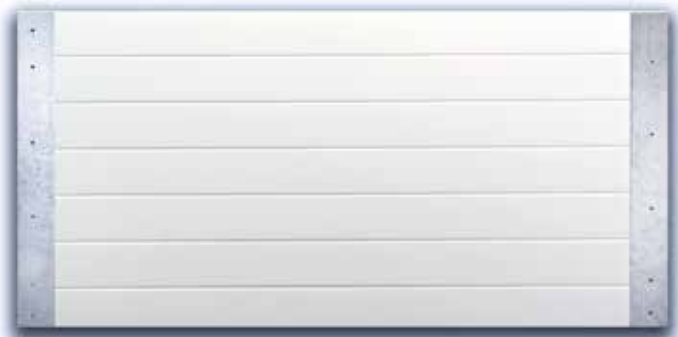

### 700 SERIES LINKS

*Click links for info.*

[HOMEPAGE](#)

[BIM](#)

[BROCHURE](#)

[SPECS](#)

[GALLERY](#)

[SPECWIZARD](#)

[CAD](#)

[CATALOG](#)

Rev. 2.1 – October 2017