

**C2415L INSULATED SMOOTH RIBBED STEEL DOOR**


**SERIES FEATURES**

- 2”(50.8mm) Thick
- 7.45 Calculated R-Value
- .135 Calculated U-Value
- 24-Gauge Galvanized Steel
- 16-Gauge C-Shaped Steel End Stile
- Tongue-and-Groove Section Joint
- Available with Wind Load
- 3 Color Options
- Limited 1Year Warranty

**MODEL FEATURES**


- Smooth Ribbed
- Insulated laminate backer panel

**AVAILABLE COLORS**



*Colors are not exact due to the differences in monitor and printer calibrations. For accurate color samples, contact Haas Door for a metal color selector.*

Exterior View

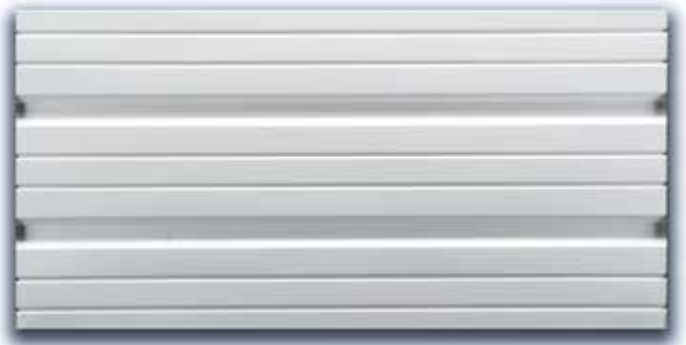

Interior View



**RIBBED STEEL SERIES LINKS**

*Click links for info.*

[HOMEPAGE](#)

[BIM](#)

[BROCHURE](#)

[SPECS](#)

[GALLERY](#)

[SPECWIZARD](#)

[CAD](#)

[CATALOG](#)

Rev. 2.1 – October 2017