


## C2511S INSULATED SMOOTH RIBBED STEEL DOOR

### SERIES FEATURES

- 2"(50.8mm) Thick
- 7.45 Calculated R-Value
- .135 Calculated U-Value
- 24-Gauge Nominal Galvanized Steel
- 18-Gauge C-Shaped Steel End Stile
- Tongue-and-Groove Section Joint
- Available with Wind Load
- Available in Polar White
- Limited 1Year Warranty

### AVAILABLE COLORS




Polar White

*Colors are not exact due to the differences in monitor and printer calibrations. For accurate color samples, contact Haas Door for a metal color selector.*


### MODEL FEATURES

- Smooth Ribbed
- Insulated steel backer panel

Exterior View

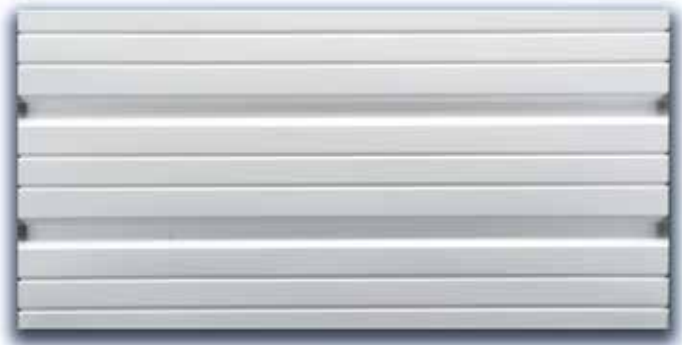

Interior View

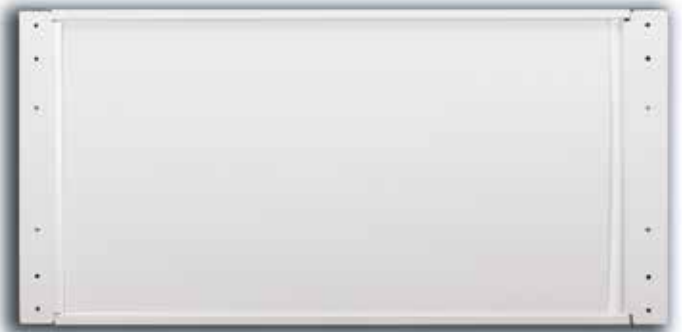

### RIBBED STEEL SERIES LINKS

*Click links for info.*

[HOMEPAGE](#)

[BIM](#)

[BROCHURE](#)

[SPECS](#)

[GALLERY](#)

[SPECWIZARD](#)

[CAD](#)

[CATALOG](#)

Rev. 2.1 – October 2017